

Technical Data Sheet

Industry PRO 2 Suspended



Product description

The use of state-of-the-art LED technology in conventional office and hall illumination provides a lot of advantages like an optimal light distribution and an increased lifetime all at an affordable price. LED FlatPanels are fully compatible with existing conventional lighting infrastructure, and are the perfect choice for both new and replacement markets.





Technical description

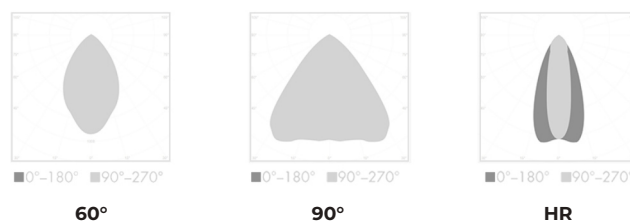
Mains voltage	220 - 240 V AC, 50 - 60Hz
Connection	3-pole
Protection rating	IP 65
Light source	LED
Optical system	Lenses
Wiring	Fix / 1-10V / DALI
Diffuser material	Polycarbonate
Housing material	Aluminum
Ambient temperature	-25 °C to +30 °C
Service lifetime (L90, B10)	60 000h
Impact rating	IK 08
Accessories	Chain suspension
Warranty	5 years

Version	CCT	Power consup.	Output	CRI (Ra)	lm / W
S	4000 k	78 W	10 630 lm	80+	136
	5000 k	78 W	10 542 lm	80+	135
M	4000 k	103 W	14 666 lm	80+	142
	5000 k	103 W	14 554 lm	80+	141
L	4000 k	157 W	21 260 lm	80+	135
	5000 k	157 W	21 084 lm	80+	134
XL	4000 k	236 W	31 890 lm	80+	135
	5000 k	236 W	31 626 lm	80+	134

Dimensions

S		l 320 mm w 92 mm h 100 mm
L		l 320 mm w 192 mm h 100 mm
M		l 320 mm w 192 mm h 100 mm
XL		l 320 mm w 296 mm h 100 mm

Optics



Product code

The technical specifications of the luminaire are determined through the combination of 4 categories, which result in a unique product code.

	Value	Code
Model	Industry PRO 2 Suspended	INDSUSP2
Version	S	S
	M	M
	L	L
	XL	XL
Color temperature	4000 k	840
	5000 k	850
Dimming	Fix	1
	1-10v	2
	DALI	3
Beam angle	60°	60
	90°	90
	HR	HR
Accessories	none	NO
	Chain suspension	CH

Configuration example

Industry PRO Suspended

Luminaire with a power consumption of 78 W that produce a luminous flux of 10630 lm. FIX, S version, 60° optic, color temperature of 4000k, no accessories

Code: **INDSUSP2 S 840 1 60 NO**