

Technical Data Sheet

Interno



Product description


The use of state-of-the-art LED technology in conventional office and hall illumination provides a lot of advantages like an optimal light distribution and an increased lifetime all at an affordable price. LED Lights are fully compatible with existing conventional lighting infrastructure, and are the perfect choice for both new and replacement markets.




Technical description

Mains voltage	220 - 240 V AC, 50 - 60Hz
Connection	3-phase connector
Protection rating	IP 20
Light source	LED
Optical system	Reflector
Wiring	Fix / 1-10V / DALI
Light output module	1100lm / 2000lm / 3000lm
Housing material	Aluminum
Ambient temperature	0 °C to +25 °C
Service lifetime (L80, B10)	50 000h
Warranty	5 years

Light distribution

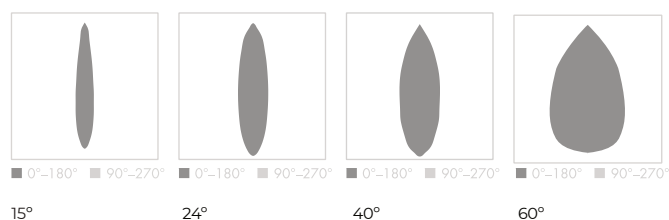

Dimensions

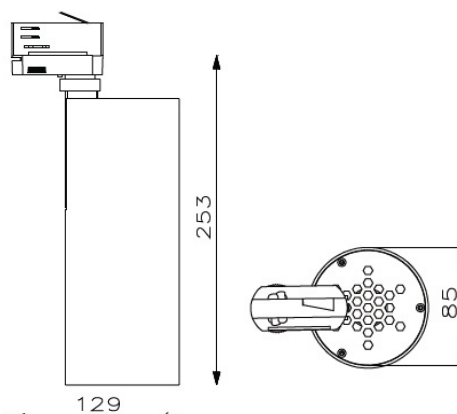

Model	lm	Power consp.	lm/W	CCT	CRI
SLM G7	1100	6W	183	827, 830, 840	80
SLM G7	1100	8W	138	927, 930, 930PW	90
SLM G7	1100	7W	157	940PW	90
SLM G7	1100	10W	110	922PA	90
SLM G7	1100	8W	137	930PC	90
SLM G7	2000	12W	167	827, 830, 840	80
SLM G7	2000	15W	133	927, 930, 930PW	90
SLM G7	2000	14W	143	940PW	90
SLM G7	2000	19W	105	922PA	90
SLM G7	2000	16W	125	930PC	90
SLM G7	3000	18W	166	827, 830, 840	80
SLM G7	3000	22W	136	927, 930, 930PW	90
SLM G7	3000	20W	150	940PW	90
SLM G7	3000	31W	96	922PA	90
SLM G7	3000	24W	125	930PC	90