

# Technical Data Sheet

## Lungo



### Product description


The use of state-of-the-art LED technology in conventional office and hall illumination provides a lot of advantages like an optimal light distribution and an increased lifetime all at an affordable price. LED Lights are fully compatible with existing conventional lighting infrastructure, and are the perfect choice for both new and replacement markets.




### Technical description

<b>Mains voltage</b>	220 - 240 V AC, 50 - 60Hz
<b>Connection</b>	3-phase connector
<b>Protection rating</b>	IP 20
<b>Light source</b>	LED
<b>Optical system</b>	Reflector
<b>Wiring</b>	Fix / 1-10V / DALI
<b>Light output module</b>	1100lm / 2000lm / 3000lm
<b>Housing material</b>	Aluminum
<b>Ambient temperature</b>	0 °C to +25 °C
<b>Service lifetime (L80, B10)</b>	50 000h
<b>Warranty</b>	5 years

### Light distribution

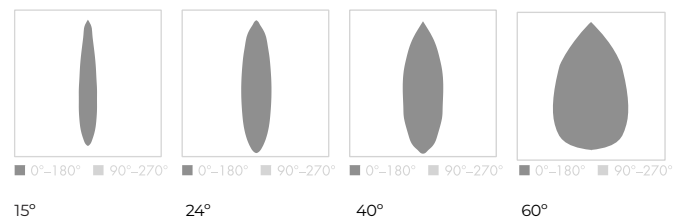

### Dimensions

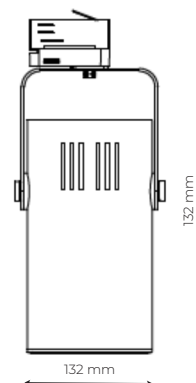

<b>Model</b>	<b>lm</b>	<b>Power consup.</b>	<b>lm/W</b>	<b>CCT</b>	<b>CRI</b>
<b>SLM G7</b>	1100	6W	183	827, 830, 840	80
<b>SLM G7</b>	1100	8W	138	927, 930, 930PW	90
<b>SLM G7</b>	1100	7W	157	940PW	90
<b>SLM G7</b>	1100	10W	110	922PA	90
<b>SLM G7</b>	1100	8W	137	930PC	90
<b>Food warm white</b>	1100	11W	100	925FFW	90
<b>Meat premium red</b>	1100	16W	69	925MPR	90
<b>Fresh fish</b>	1100	13W	85	940FF	90
<b>SLM G7</b>	2000	12W	167	827, 830, 840	80
<b>SLM G7</b>	2000	15W	133	927, 930, 930PW	90
<b>SLM G7</b>	2000	14W	143	940PW	90
<b>SLM G7</b>	2000	19W	105	922PA	90
<b>SLM G7</b>	2000	16W	125	930PC	90
<b>Food warm white</b>	2000	22W	91	925FFW	90
<b>Meat premium red</b>	2000	30W	67	925MPR	90
<b>Fresh fish</b>	2000	22W	91	940FF	90
<b>SLM G7</b>	3000	18W	166	827, 830, 840	80
<b>SLM G7</b>	3000	22W	136	927, 930, 930PW	90
<b>SLM G7</b>	3000	20W	150	940PW	90
<b>SLM G7</b>	3000	31W	96	922PA	90
<b>SLM G7</b>	3000	24W	125	930PC	90