

# Technical Data Sheet

## Stanley




### Technical description

<b>Mains voltage</b>	220 - 240 V AC, 50 - 60Hz
<b>Connection</b>	3-pole
<b>Protection rating</b>	IP 20
<b>Light source</b>	LED
<b>Optical system</b>	Opal diffuser
<b>Wiring</b>	Fix / 1-10V / DALI / Wireless DALI
<b>Diffuser material</b>	Polycarbonate
<b>Housing material</b>	Steel
<b>Ambient temperature</b>	0 °C to +30 °C
<b>Surface finish</b>	Powder coating
<b>Warranty</b>	2 years

Size	CCT	Power consup.	Output	CRI (Ra)	lm / W
<b>500</b>	4000 k	40 W	3042 lm	80+	76
<b>600</b>	4000 k	72 W	5476 lm	80+	76
<b>800</b>	4000 k	90 W	6845 lm	80+	76
<b>1000</b>	4000 k	100 W	7606 lm	80+	76
<b>1200</b>	4000 k	160 W	12 169 lm	80+	76

### Dimensions

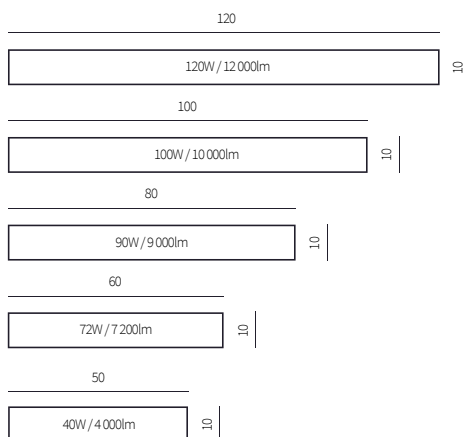

### Light distribution

