

# Technical datasheet

## Recon-M-740



### Product description

Recon is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.




LED 220-240 V 50-60 Hz IP66   CCT 4000 k CRI 70+

### Product technical data


|                       |                        |
|-----------------------|------------------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz |
| Connection method     | Connection cable       |
| IP rating             | 66                     |
| Protection class      | I                      |
| Ambient temperature   | -30 to +35 °C          |
| Light source          | LED                    |
| Colour temperature    | 4000k                  |
| Color rendering index | 70                     |
| Rated luminous flux   | 7,170 lm               |
| Connected load        | 48.95 W                |
| Luminous efficacy     | 146.5 lm/W             |

|                            |                    |
|----------------------------|--------------------|
| Inrush current             | 90 A               |
| Optical system             | Lenses             |
| Optical part material      | Hardened glass     |
| Housing material           | Die-cast aluminium |
| Surface finish             | Powder coated      |
| Width                      | 243.00 cm          |
| Height                     | 53.00 cm           |
| Length                     | 280.00 cm          |
| Weight                     | 1.55 kg            |
| Service lifetime (L80 B10) | 35 000 h           |
| Warranty                   | 3 years            |

### Dimensions



### Light distribution

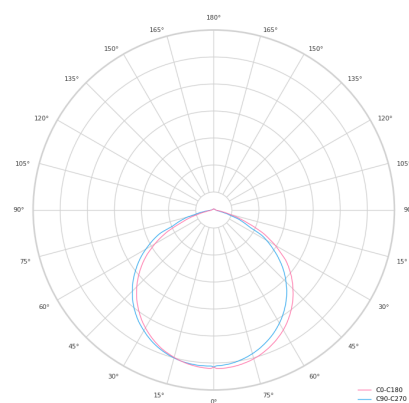

## Optional products

Recon sensor

---