

# Technical datasheet

## Recon-M-750



### Product description

Recon is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.




LED 220-240 V 50-60Hz IP66   CCT 5000 k CRI 70+

### Product technical data


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Connection cable
IP rating	66
Protection class	I
Ambient temperature	-30 to +35 °C
Light source	LED
Colour temperature	5000k
Color rendering index	70
Rated luminous flux	7,170 lm
Connected load	48.95 W
Luminous efficacy	146.5 lm/W

Inrush current	90 A
Optical system	Lenses
Optical part material	Hardened glass
Housing material	Die-cast aluminium
Surface finish	Powder coated
Width	243.00 cm
Height	53.00 cm
Length	280.00 cm
Weight	1.55 kg
Service lifetime (L80 B10)	35 000 h
Warranty	3 years

### Dimensions



### Light distribution

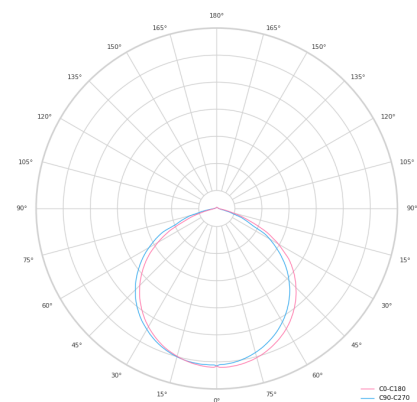

## Optional products

Recon sensor

---