

# Technical datasheet

## DIABLO-S-927-2-36-BL



### Product description

Diablo is a compact 3-phase LED spotlight with integrated power supply and aluminum heatsink with 50,000 hours lifetime. Available in 3 power options, wide range of color temperatures (2700K-4000K) with CRI 80+/90+. Four light distribution types (15°, 24°, 36°, 60°) and DALI control option available. Ideal for commercial spaces, showrooms and households. 5-year warranty.



LED

220-240V  
50-60Hz

IP20

CCT  
2700 k

CRI  
90+


### Product technical data

|                       |                        |                            |                    |
|-----------------------|------------------------|----------------------------|--------------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz | Ripple                     | 3 %                |
| Connection method     | 3-phase track adapter  | DALI address               | 1                  |
| Dimming type          | DALI                   | Standby power              | 0.50 W             |
| IP rating             | 20                     | Inrush current             | 5 A                |
| Protection class      | II                     | Inrush time                | 50 µs              |
| Ambient temperature   | 0 to +25 °C            | Optical system             | Lenses             |
| Light source          | LED                    | Optical part material      | PMMA               |
| Colour temperature    | 2700k                  | Housing material           | Die-cast aluminium |
| Color rendering index | 90                     | Surface finish             | Powder coated      |
| Rated luminous flux   | 1,793 lm               | Height                     | 132.00 cm          |
| Connected load        | 13.82 W                | Diameter                   | 90.00 cm           |
| Luminous efficacy     | 129.8 lm/W             | Weight                     | 0.80 kg            |
|                       |                        | Service lifetime (L80 B10) | 50 000 h           |
|                       |                        | Warranty                   | 5 years            |

### Dimensions



### Light distribution

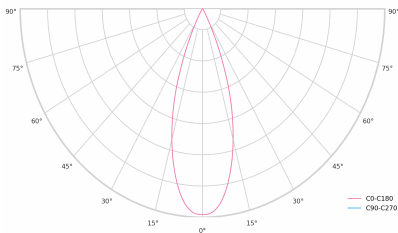

Optional products



PRO-0410



PRO-0420



PRO-0431L



PRO-0431R



PRO-0432



PRO-0433



PRO-0434



PRO-0437



PRO-EZ0449



PRO-M435



PRO-M436



PRO-M438

DALI 2

DALI (Digital Addressable Lighting Interface) is an international standard for digital lighting control systems. It enables individual control of each luminaire in the network using digital signals - unlike traditional analog solutions.

- Key DALI2 innovations:
- Advanced diagnostic capabilities
  - Better fault reporting and device status
  - Enhanced scene programming options
  - Support for RGB/RGBW and tunable white