

# Technical datasheet

## GEMINYS-930-1-BL-




### Product description


Geminy linear lamp is designed to create smaller atmospheres within larger spaces. The design features elegant lines and subtle details, along with copper details that complement the structure of the lamp and provide a rich material contrast to powder-coated parts, creating a modern and functional light for any space.

**LED** 220-240 V 50-60 Hz **IP20**  **CE** **CCT 3000 k** **CRI 90+**


### Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	1 %
Connection method	Plug-in terminal	Inrush current	18 A
Dimming type	Non-dimmable	Inrush time	154 μs
IP rating	20	Optical system	Diffuser
Protection class	I	Optical part material	PMMA
Ambient temperature	0 to +25 °C	Housing material	Steel
Light source	LED	Surface finish	Powder coated
Colour temperature	3000k	Width	40.00 cm
Color rendering index	90	Height	40.00 cm
Rated luminous flux	2,077 lm	Length	1,200.00 cm
Connected load	18.51 W	Weight	4.00 kg
Luminous efficacy	112.2 lm/W	Service lifetime (L80 B10)	50 000 h
		Warranty	5 years

### Dimensions

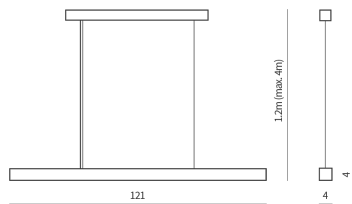

### Light distribution

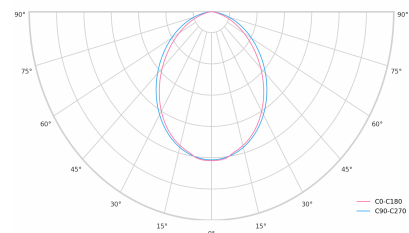

**Available cable colors**

