

Technical datasheet

GEMINYL-930-1-WH-




Product description

Geminy linear lamp is designed to create smaller atmospheres within larger spaces. The design features elegant lines and subtle details, along with copper details that complement the structure of the lamp and provide a rich material contrast to powder-coated parts, creating a modern and functional light for any space.


LED 220-240 V 50-60 Hz
 IP20
 
 CE
 CCT 3000 k
 CRI 90+

Product technical data


| | |
|-----------------------|------------------------|
| Mains voltage | 220 - 240V AC, 50/60Hz |
| Connection method | Plug-in terminal |
| Dimming type | Non-dimmable |
| IP rating | 20 |
| Protection class | I |
| Ambient temperature | 0 to +25 °C |
| Light source | LED |
| Colour temperature | 3000k |
| Color rendering index | 90 |
| Rated luminous flux | 3,204 lm |
| Connected load | 29.99 W |
| Luminous efficacy | 106.8 lm/W |

| | |
|----------------------------|---------------|
| Ripple | 1 % |
| Inrush current | 17 A |
| Inrush time | 162 μs |
| Optical system | Diffuser |
| Optical part material | PMMA |
| Housing material | Steel |
| Surface finish | Powder coated |
| Width | 40.00 cm |
| Height | 40.00 cm |
| Length | 1,200.00 cm |
| Weight | 4.00 kg |
| Service lifetime (L80 B10) | 50 000 h |
| Warranty | 5 years |

Dimensions

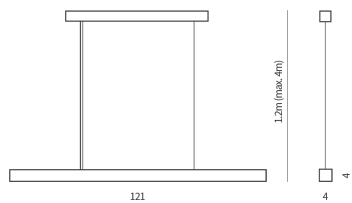

Light distribution

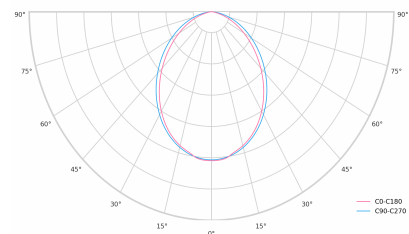

Available cable colors

