

Technical datasheet

GEMINYXL-830-1-BL-




Product description

Geminy linear lamp is designed to create smaller atmospheres within larger spaces. The design features elegant lines and subtle details, along with copper details that complement the structure of the lamp and provide a rich material contrast to powder-coated parts, creating a modern and functional light for any space.

LED 220-240 V 50-60 Hz **IP20**  **CE** **CCT 3000 k** **CRI 80+**

Product technical data

Mains voltage 220 - 240V AC, 50/60Hz
Connection method Plug-in terminal
Dimming type Non-dimmable

IP rating 20
Protection class I
Ambient temperature 0 to +25 °C


Light source LED
Colour temperature 3000k
Color rendering index 80
Rated luminous flux 4,651 lm
Connected load 36.66 W
Luminous efficacy 126.9 lm/W

Ripple 1 %
Inrush current 17 A
Inrush time 162 μs
Optical system Diffuser
Optical part material PMMA
Housing material Steel
Surface finish Powder coated


Width 40.00 cm
Height 40.00 cm
Length 1,800.00 cm
Weight 6.00 kg

Service lifetime (L80 B10) 50 000 h
Warranty 5 years

Dimensions

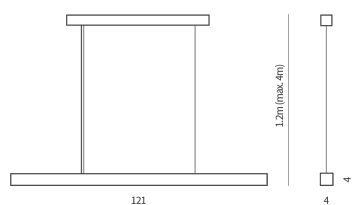

Light distribution

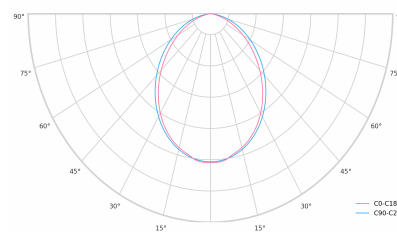

Available cable colors

