

# Technical datasheet

LINESUS1696-XL-830-2-BL-DI/IND-



## Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.


**LED** 220-240 V 50-60Hz   
 **IP20**   
   
 **CE**   
 **CCT 3000 k**   
 **CRI 80+**

## Product technical data


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
Dimming type	DALI
IP rating	20
Protection class	I
Ambient temperature	0 to +25 °C
Light source	LED
Colour temperature	3000k
Color rendering index	80
Rated luminous flux	5,194 lm
Connected load	89.98 W
Luminous efficacy	98.3 lm/W

Ripple	1 %
DALI address	2
Standby power	1.00 W
Inrush current	71 A
Inrush time	180 µs
Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Powder coated
Width	50.00 cm
Height	70.00 cm
Length	1,696.00 cm
Weight	4.00 kg
Service lifetime (L80 B10)	50 000 h
Warranty	5 years

## Dimensions

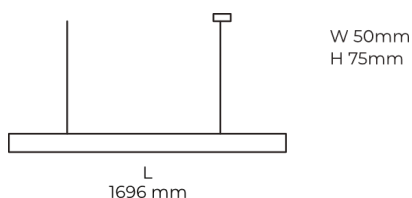

## Light distribution

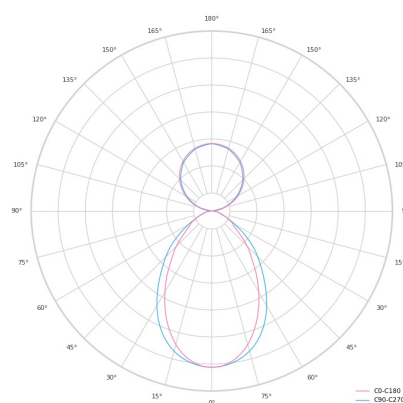

**Available cable colors**

