

Technical datasheet

LINESUS1696-XL-840-2-BL-DI/IND-



Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.


LED 220-240 V 50-60Hz **IP20** **CE** **CCT 4000 k** **CRI 80+**

Product technical data


| | |
|-----------------------|------------------------|
| Mains voltage | 220 - 240V AC, 50/60Hz |
| Connection method | Plug-in terminal |
| Dimming type | DALI |
| IP rating | 20 |
| Protection class | I |
| Ambient temperature | 0 to +25 °C |
| Light source | LED |
| Colour temperature | 4000k |
| Color rendering index | 80 |
| Rated luminous flux | 5,456 lm |
| Connected load | 89.98 W |
| Luminous efficacy | 103.3 lm/W |

| | |
|----------------------------|---------------|
| Ripple | 1 % |
| DALI address | 2 |
| Standby power | 1.00 W |
| Inrush current | 71 A |
| Inrush time | 180 µs |
| Optical system | Diffuser |
| Optical part material | PMMA |
| Housing material | Aluminium |
| Surface finish | Powder coated |
| Width | 50.00 cm |
| Height | 70.00 cm |
| Length | 1,696.00 cm |
| Weight | 4.00 kg |
| Service lifetime (L80 B10) | 50 000 h |
| Warranty | 5 years |

Dimensions

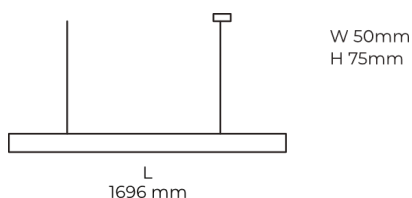

Light distribution

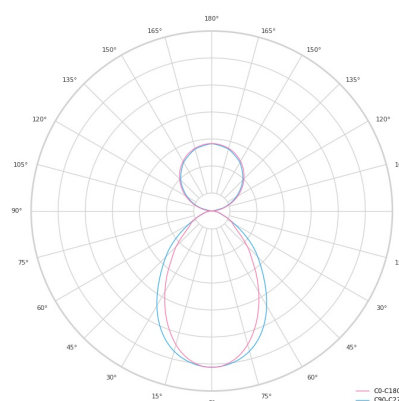

Available cable colors

