

Technical datasheet

LINESUS2258-L-930-2-BL-DI/IND-



Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

LED 220-240 V IP20   CCT CRI
 50-60Hz 3000 k 90+

Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	1 %
Connection method	Plug-in terminal	DALI address	2
Dimming type	DALI	Standby power	1.00 W
IP rating	20	Inrush current	71 A
Protection class	I	Inrush time	180 µs
Ambient temperature	0 to +25 °C	Optical system	Diffuser
Light source	LED	Optical part material	PMMA
Colour temperature	3000k	Housing material	Aluminium
Color rendering index	90	Surface finish	Powder coated
Rated luminous flux	4,771 lm	Width	50.00 cm
Connected load	105.03 W	Height	70.00 cm
Luminous efficacy	83.5lm/W	Length	2,258.00 cm
		Weight	5.50 kg
		Service lifetime (L80 B10)	50 000 h
		Warranty	5 years


Dimensions



W 50mm
H 75mm

L
2258 mm

Light distribution

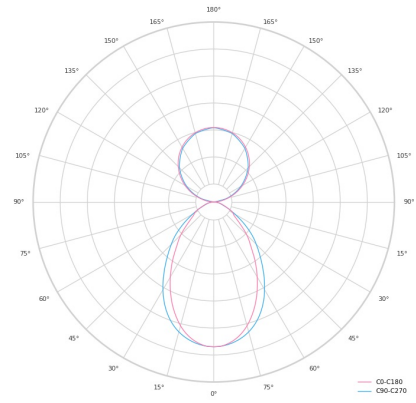

Available cable colors



0111 0900 8765 7953 3119 4867 4906 5305 2166 4406 3358 5474 5744 1257 3119z
0900z 5305z