

# Technical datasheet

## LINESUS2258-XL-840-2-BL-DI/IND-



### Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

**LED** 220-240 V 50-60 Hz **IP20**  **CE** **CCT 4000 k** **CRI 80+**

### Product technical data


Mains voltage	220 - 240V AC, 50/60Hz	Ripple	1 %
Connection method	Plug-in terminal	DALI address	2
Dimming type	DALI	Standby power	1.00 W
IP rating	20	Inrush current	71 A
Protection class	I	Inrush time	180 µs
Ambient temperature	0 to +25 °C	Optical system	Diffuser
Light source	LED	Optical part material	PMMA
Colour temperature	4000k	Housing material	Aluminium
Color rendering index	80	Surface finish	Powder coated
Rated luminous flux	7,275 lm	Width	50.00 cm
Connected load	117.90 W	Height	70.00 cm
Luminous efficacy	103.2 lm/W	Length	2,258.00 cm
		Weight	5.50 kg
		Service lifetime (L80 B10)	50 000 h
		Warranty	5 years

**Dimensions**



W 50mm  
H 75mm

**Light distribution**

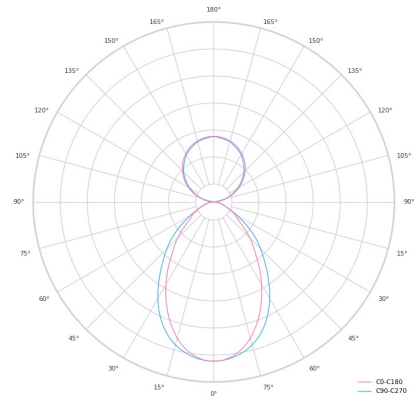

**Available cable colors**

