

# Technical datasheet

LINESUS2820-M-940-1-BL-DI/IND-



## Product description


LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

**LED** 220-240 V 50-60 Hz **IP20** **CE** **CCT 4000 k** **CRI 90+**


## Product technical data

<b>Mains voltage</b>	220 - 240V AC, 50/60Hz	<b>Ripple</b>	2 %
<b>Connection method</b>	Plug-in terminal	<b>Inrush current</b>	55 A
<b>Dimming type</b>	Non-dimmable	<b>Inrush time</b>	188 μs
<b>IP rating</b>	20	<b>Optical system</b>	Diffuser
<b>Protection class</b>	I	<b>Optical part material</b>	PMMA
<b>Ambient temperature</b>	0 to +25 °C	<b>Housing material</b>	Aluminium
<b>Light source</b>	LED	<b>Surface finish</b>	Powder coated
<b>Colour temperature</b>	4000k	<b>Width</b>	50.00 cm
<b>Color rendering index</b>	90	<b>Height</b>	70.00 cm
<b>Rated luminous flux</b>	4,881 lm	<b>Length</b>	2,820.00 cm
<b>Connected load</b>	108.23 W	<b>Weight</b>	6.80 kg
<b>Luminous efficacy</b>	95.1 lm/W	<b>Service lifetime (L80 B10)</b>	50 000 h
		<b>Warranty</b>	5 years

## Dimensions

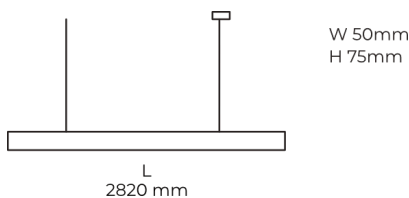

## Light distribution

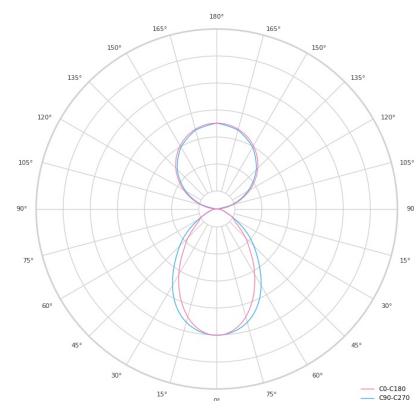

**Available cable colors**

