

Technical datasheet

IP65-1500-M-840-1



Product description

Led linear luminaire for dusty environments with IP65 protection and 5 year warranty.




LED 220-240 V
50-60 Hz IP65   

Product technical data

| | |
|---------------------|------------------------|
| Mains voltage | 220 - 240V AC, 50/60Hz |
| Connection method | Plug-in terminal |
| Dimming type | Non-dimmable |
| IP rating | 65 |
| Protection class | I |
| Impact rating | IK 08 |
| Ambient temperature | -20 to +40 °C |
| Light source | LED |
| Rated luminous flux | 8,128 lm |
| Connected load | 58.30 W |
| Luminous efficacy | 139.4 lm/W |

| | |
|----------------------------|-------------|
| Inrush current | 24 A |
| Inrush time | 220 µs |
| Optical system | Diffuser |
| Optical part material | PC |
| Housing material | Plastic |
| Width | 74.00 cm |
| Height | 64.00 cm |
| Length | 1,502.00 cm |
| Weight | 1.70 kg |
| Service lifetime (L80 B10) | 50 000 h |
| Warranty | 5 years |

Dimensions

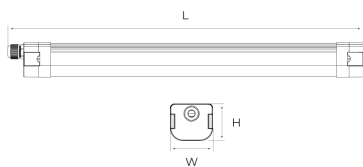

Light distribution

