

# Technical datasheet

## Ring-M-830-2-SUR-BL-




### Product description

Ring is a circular LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 3 sizes, color temperatures 3000K/4000K with CRI 80+. Suspended and surface mounting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.


**LED** 220-240 V 50-60 Hz **IP20**  **CE** **CCT 3000 k** **CRI 80+**

### Product technical data


|                       |                        |
|-----------------------|------------------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz |
| Connection method     | Screw terminal         |
| Dimming type          | DALI                   |
| IP rating             | 20                     |
| Protection class      | I                      |
| Ambient temperature   | 0 to +25 °C            |
| Light source          | LED                    |
| Colour temperature    | 3000k                  |
| Color rendering index | 80                     |
| Rated luminous flux   | 5,016 lm               |
| Connected load        | 57.00 W                |
| Luminous efficacy     | 88.0 lm/W              |

|                            |           |
|----------------------------|-----------|
| Optical system             | Diffuser  |
| Optical part material      | PMMA      |
| Housing material           | Aluminium |
| Surface finish             | Painted   |
| Height                     | 60.00 cm  |
| Diameter                   | 900.00 cm |
| Weight                     | 7.80 kg   |
| Service lifetime (L80 B10) | 50 000 h  |
| Warranty                   | 5 years   |

### Dimensions

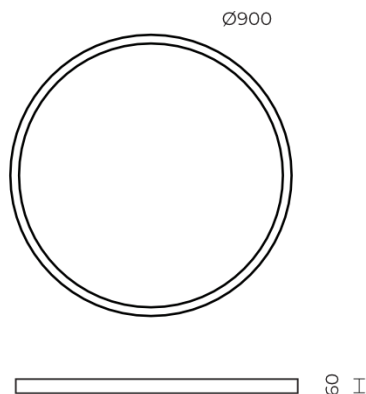

### Light distribution

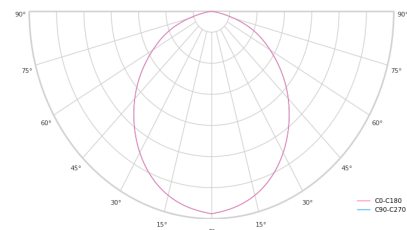

**Available cable colors**

