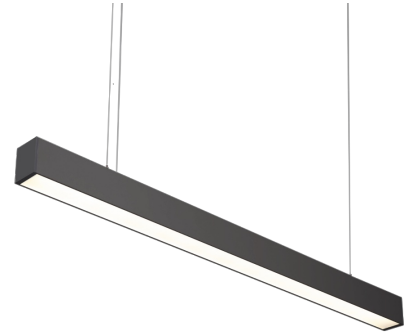


Technical datasheet

BASICSUS-1500-840-1-PD-BL

Product description

Basic linear led luminaire for offices, meeting rooms, corridors and households.


LED 220-240 V 50-60 Hz **IP20**   **CCT 4000 k** **CRI 80+**

Product technical data

| | |
|-----------------------|------------------------|
| Mains voltage | 220 - 240V AC, 50/60Hz |
| Connection method | Plug-in terminal |
| Dimming type | Non-dimmable |
| IP rating | 20 |
| Protection class | I |
| Ambient temperature | 0 to +25 °C |
| Light source | LED |
| Colour temperature | 4000k |
| Color rendering index | 80 |
| Rated luminous flux | 3,896 lm |
| Connected load | 31.62 W |
| Luminous efficacy | 123.2 lm/W |

| | |
|----------------------------|---------------|
| Optical system | Lenses |
| Optical part material | PC |
| Housing material | Aluminium |
| Surface finish | Powder coated |
| Width | 50.00 cm |
| Height | 70.00 cm |
| Length | 1,500.00 cm |
| Weight | 2.00 kg |
| Service lifetime (L80 B30) | 50 000 h |
| Warranty | 3 years |

Dimensions



l 1500 mm
 w 50 mm
 h 73 mm

Light distribution

