

# Family datasheet

## Area G3



### Product description

Area G3 is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.




LED 220-240 V 50-60Hz IP66  

### Technical description


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Connection cable
IP rating	66
Protection class	I
Impact rating	IK 08
Light source	LED
Switching type	Non-dimmable , DALI
CRI	80
CCT	4000K, 5000K
Lumen output	14088-35289 lm
Efficiency	Up to 176 lm/W
Power consumption	100-200 W

Optical system	Lenses
Optical part material	Hardened glass
Housing material	Die-cast aluminium
Surface finish	Powder coated
Ambient temperature	-30 to +35°C
Service lifetime (L80 B10)	50 000h
Warranty	5 years

### Dimensions



### Light distribution curves

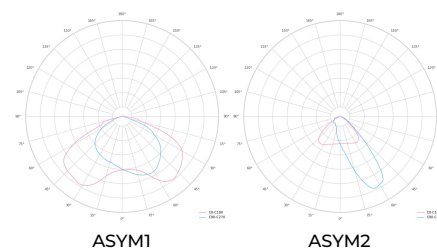

## Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **AREA-L-840-1-ASYM2**

Attribute	Value	Code
Model	Area G3	AREA-
Version	S	S
	M	M
	L	L
CCT	4000k (CRI 80+)	840
	5000k (CRI 80+)	850
Dimming	Non-dimmable	1
	DALI	2
Light distribution	ASYM1	ASYM1
	ASYM2	ASYM2