

Technical Data Sheet

Ring




Technical description

Mains voltage	220 - 240 V AC, 50 - 60Hz
Connection	3-pole
Protection rating	IP 20
Light source	LED
Optical system	Opal diffuser
Wiring	Fix / DALI
Diffuser material	Polycarbonate
Housing material	Aluminum
Ambient temperature	0 °C to +25 °C
Service lifetime (L80, B20)	50 000h
Warranty	5 years

Version	CCT	Power consup.	Output	CRI (Ra)	lm / W
S	3000 k	38 W	3344 lm	80+	88
	4000 k	38 W	3610 lm	80+	95
M	3000 k	57 W	5016 lm	80+	88
	4000 k	57 W	5415 lm	80+	95
L	3000 k	75 W	6600 lm	80+	88
	4000 k	75 W	7125 lm	80+	95

Dimensions

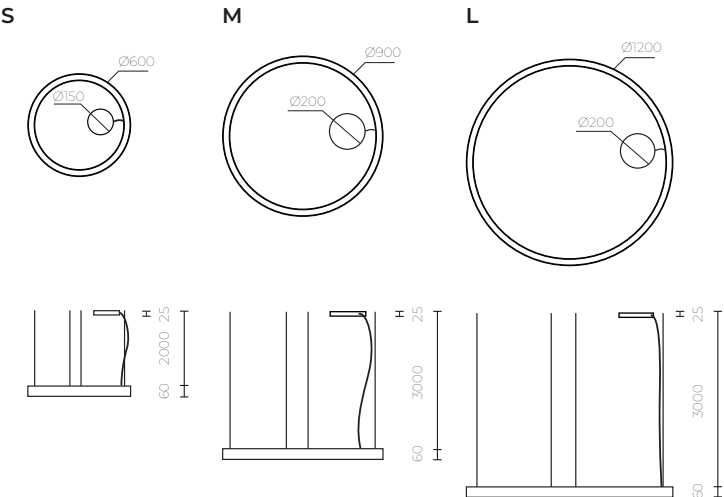

Optics

