
Technical datasheet

HEA3-L-840-1-HR



Product description


Heavy LED light is perfect for heavy industry, with high temperature resistance up to +60°C. Its casing prevents dust from reaching the coolers and a thin film on the lens protects against particles. With an efficiency of up to 164 lm/W, it provides bright and efficient lighting for your production hall. Say goodbye to issues with graphite fracture particles - Heavy
LED light is the solution.

LED | 220-240 V 50-60 Hz | IP65 | CCT 4000 k | CRI 80+ | CLO | MildNight Multi-Step Dimming

Product technical data


Mains voltage	220 - 240V AC, 50/60Hz	Ripple	3 %
Connection method	Connection cable	Inrush current	89 A
Dimming type	Non-dimmable	Inrush time	584 µs
IP rating	65	Optical system	Lenses
Protection class	I	Optical part material	PC
Impact rating	IK 08	Housing material	Aluminium
Ambient temperature	-25 to +60 °C	Surface finish	Powder coated
Light source	LED	Width	296.00 cm
Colour temperature	4000k	Height	135.00 cm
Color rendering index	80	Length	320.00 cm
Rated luminous flux	32,225 lm	Weight	7.50 kg
Connected load	196.22 W	Service lifetime (L80 B10)	75 000 h
Luminous efficacy	164.2 lm/W	Warranty	5 years

Dimensions



L 320 mm
W 292 mm
H 135 mm


Light distribution

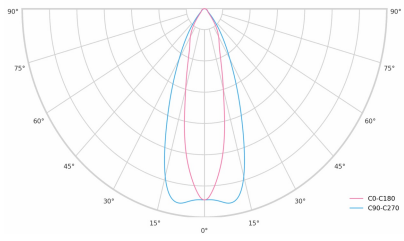

Constant Light Output (CLO)

This system compensates for the depreciation of luminousflux to avoid excess lightingat the beginningof the installation's service life. Luminous depreciation over time must be taken into account to ensure a predefined lightinglevel duringthe luminaire's usefullife.

Without a CLO feature, this simply means increasingthe initial power upon installationin order tomake up for luminous depreciation. By precisely controlling the luminous flux,the energy needed to reach the required level can be maintained throughout the luminaire's life.

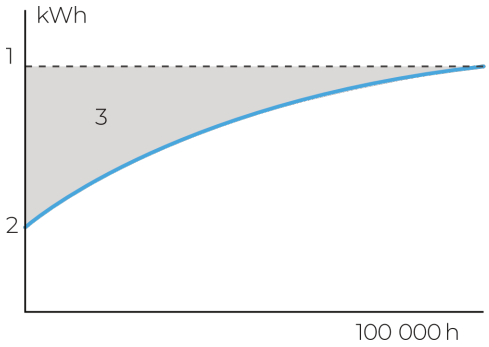


A. Dimming level
B. Time

MidNight function

The MidNight function feature allows an autonomous dimming without the need for an additional control line. The output levels can be set to 0% (OFF) or between 10% and 100% in steps of 1%

Time-based: The dimming profile defined in the reference schedule is referenced to the switchon time of the LED driver.

Astro-based: The dimming profile defined in the reference schedule is referenced to the annual average middle of the night, which is calculated based on the theoretical sunrise and sunset times.

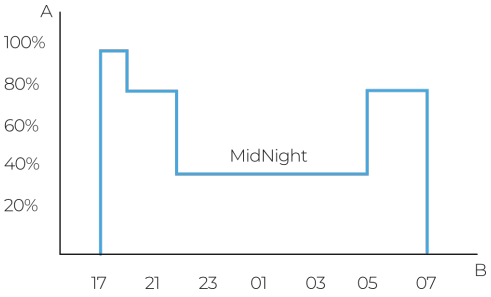

1. Standard lighting level
2. LED lighting consumption with CLO
3. Energy savings