# Technical datasheet

## Recon-M-750




### Product description

Recon is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.


LED | 220-240V 50-60Hz | IP66 | CCT 5000 k | CRI 70+

### Product technical data


| | |
|---|---|
| Mains voltage | 220 - 240V AC, 50/60Hz |
| Connection method | Connection cable |
| IP rating | 66 |
| Protection class | I |
| Ambient temperature | -30 to +35 °C |
| Light source | LED |
| Colour temperature | 5000k |
| Color rendering index | 70 |
| Rated luminous flux | 7,170 lm |
| Connected load | 48.95 W |
| Luminous efficacy | 146.5 lm/W |

| | |
|---|---|
| Inrush current | 90 A |
| Optical system | Lenses |
| Optical part material | Hardened glass |
| Housing material | Die-cast aluminium |
| Surface finish | Powder coated |
| Width | 243.00 cm |
| Height | 53.00 cm |
| Length | 280.00 cm |
| Weight | 1.55 kg |
| Service lifetime (L80 B10) | 35 000 h |
| Warranty | 3 years |

### Dimensions




### Light distribution

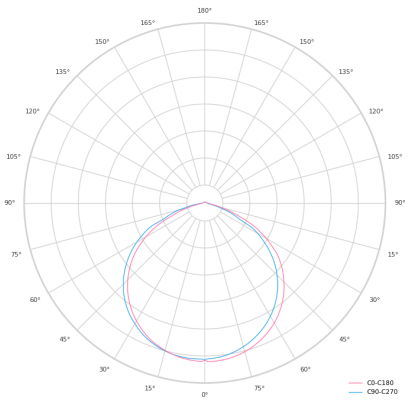

## Optional products

Recon sensor