# Technical datasheet

## GEMINYXL-830-1-BL-



### Product description

Geminy linear lamp is designed to create smaller atmospheres within larger spaces. The design features elegant lines and subtle details, along with copper details that complement the structure of the lamp and provide a rich material contrast to powder-coated parts, creating a modern and functional light for any space.


LED | 220-240V 50-60Hz | IP20 | CE | CCT 3000 k | CRI 80+

### Product technical data


| | |
|---|---|
| Mains voltage | 220 - 240V AC, 50/60Hz |
| Connection method | Plug-in terminal |
| Dimming type | Non-dimmable |
| IP rating | 20 |
| Protection class | I |
| Ambient temperature | 0 to +25 °C |
| Light source | LED |
| Colour temperature | 3000k |
| Color rendering index | 80 |
| Rated luminous flux | 4,651 lm |
| Connected load | 36.66 W |
| Luminous efficacy | 126.9 lm/W |

| | |
|---|---|
| Ripple | 1 % |
| Inrush current | 17 A |
| Inrush time | 162 µs |
| Optical system | Diffuser |
| Optical part material | PMMA |
| Housing material | Steel |
| Surface finish | Powder coated |
| Width | 40.00 cm |
| Height | 40.00 cm |
| Length | 1,800.00 cm |
| Weight | 6.00 kg |
| Service lifetime (L80 B10) | 50 000 h |
| Warranty | 5 years |

### Dimensions

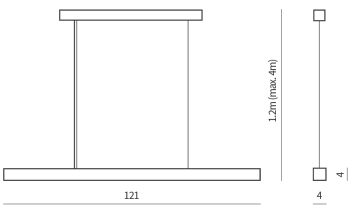


### Light distribution

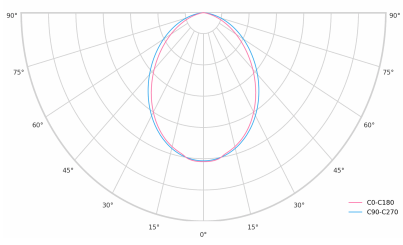

## Available cable colors

