

# Technical datasheet

## GEMINYXL-930-1-WH-




### Product description

Geminy linear lamp is designed to create smaller atmospheres within larger spaces. The design features elegant lines and subtle details, along with copper details that complement the structure of the lamp and provide a rich material contrast to powder-coated parts, creating a modern and functional light for any space.


**LED** 220-240 V 50-60 Hz **IP20**  **CE** **CCT 3000 k** **CRI 90+**

### Product technical data


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
Dimming type	Non-dimmable
IP rating	20
Protection class	I
Ambient temperature	0 to +25 °C
Light source	LED
Colour temperature	3000k
Color rendering index	90
Rated luminous flux	3,937 lm
Connected load	38.36 W
Luminous efficacy	102.6 lm/W

Ripple	1 %
Inrush current	17 A
Inrush time	162 μs
Optical system	Diffuser
Optical part material	PMMA
Housing material	Steel
Surface finish	Powder coated
Width	40.00 cm
Height	40.00 cm
Length	1,800.00 cm
Weight	6.00 kg
Service lifetime (L80 B10)	50 000 h
Warranty	5 years

### Dimensions

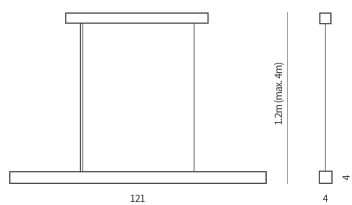

### Light distribution

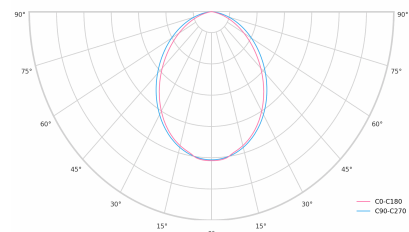

**Available cable colors**

