

# Technical datasheet

LINESUS2258-L-840-1-BL-DI-



## Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.


**LED** 220-240V 50-60Hz   
 **IP20**   
   
 **CE**   
 **CCT 4000 k**   
 **CRI 80+**

## Product technical data


|                       |                        |
|-----------------------|------------------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz |
| Connection method     | Plug-in terminal       |
| Dimming type          | Non-dimmable           |
| IP rating             | 20                     |
| Protection class      | I                      |
| Ambient temperature   | 0 to +25 °C            |
| Light source          | LED                    |
| Colour temperature    | 4000k                  |
| Color rendering index | 80                     |
| Rated luminous flux   | 5,912 lm               |
| Connected load        | 60.01 W                |
| Luminous efficacy     | 98.5 lm/W              |

|                            |               |
|----------------------------|---------------|
| Ripple                     | 2 %           |
| Inrush current             | 18 A          |
| Inrush time                | 44 μs         |
| Optical system             | Diffuser      |
| Optical part material      | PMMA          |
| Housing material           | Aluminium     |
| Surface finish             | Powder coated |
| Width                      | 50,00 cm      |
| Height                     | 70,00 cm      |
| Length                     | 2,258.00 cm   |
| Weight                     | 5.50 kg       |
| Service lifetime (L80 B10) | 50 000 h      |
| Warranty                   | 5 years       |

## Dimensions

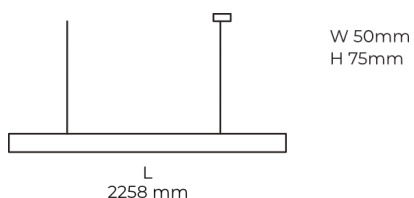

## Light distribution

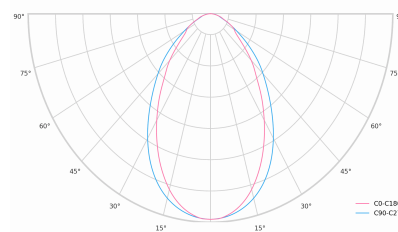

**Available cable colors**

