


Technical datasheet

LINESUS2258-L-940-2-WH-DI/IND-

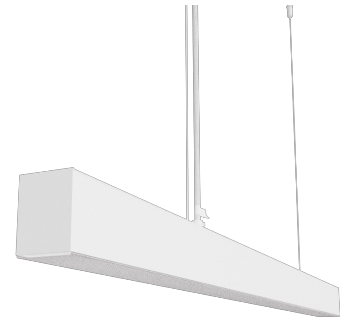

Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

LED 220-240 V 50-60Hz **IP20**  **CE** **CCT 4000 k** **CRI 90+**

Product technical data


| | | | |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage | 220 - 240V AC, 50/60Hz | Ripple | 1 % |
| Connection method | Plug-in terminal | DALI address | 2 |
| Dimming type | DALI | Standby power | 1.00 W |
| IP rating | 20 | Inrush current | 71 A |
| Protection class | I | Inrush time | 180 µs |
| Ambient temperature | 0 to +25 °C | Optical system | Diffuser |
| Light source | LED | Optical part material | PMMA |
| Colour temperature | 4000k | Housing material | Aluminium |
| Color rendering index | 90 | Surface finish | Powder coated |
| Rated luminous flux | 5,101 lm | Width | 50.00 cm |
| Connected load | 105.03 W | Height | 70.00 cm |
| Luminous efficacy | 89.3 lm/W | Length | 2,258.00 cm |
| | | Weight | 5.50 kg |
| | | Service lifetime (L80 B10) | 50 000 h |
| | | Warranty | 5 years |

Dimensions



W 50mm
H 75mm

Light distribution

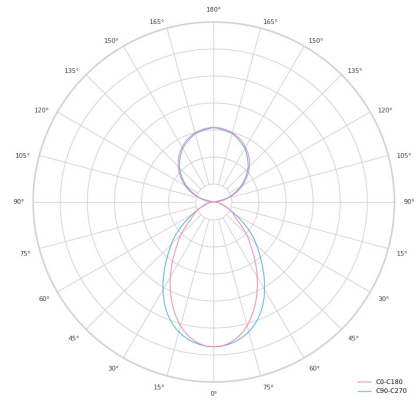

Available cable colors

