

Technical datasheet

Ring-L-830-1-SUR-WH-




Product description

Ring is a circular LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 3 sizes, color temperatures 3000K/4000K with CRI 80+. Suspended and surface mounting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.


LED 220-240 V 50-60 Hz **IP20**  **CE** **CCT 3000 k** **CRI 80+**

Product technical data


| | |
|-----------------------|------------------------|
| Mains voltage | 220 - 240V AC, 50/60Hz |
| Connection method | Screw terminal |
| Dimming type | Non-dimmable |
| IP rating | 20 |
| Protection class | I |
| Ambient temperature | 0 to +25 °C |
| Light source | LED |
| Colour temperature | 3000k |
| Color rendering index | 80 |
| Rated luminous flux | 6,600 lm |
| Connected load | 75.00 W |
| Luminous efficacy | 88.0 lm/W |

| | |
|----------------------------|-------------|
| Optical system | Diffuser |
| Optical part material | PMMA |
| Housing material | Aluminium |
| Surface finish | Painted |
| Height | 60.00 cm |
| Diameter | 1,200.00 cm |
| Weight | 12.20 kg |
| Service lifetime (L80 B10) | 50 000 h |
| Warranty | 5 years |

Dimensions

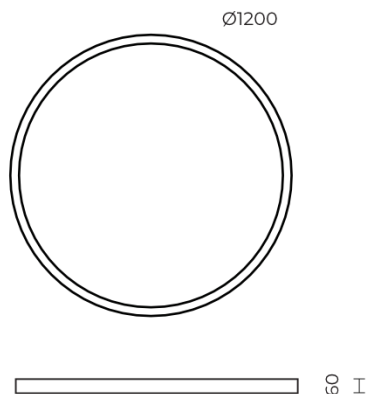

Light distribution

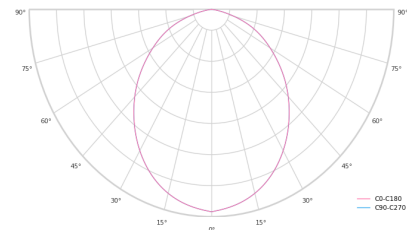

Available cable colors

