

# Technical datasheet

## Ring-L-830-2-SUR-BL-




### Product description

Ring is a circular LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 3 sizes, color temperatures 3000K/4000K with CRI 80+. Suspended and surface mounting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.


**LED** 220-240 V 50-60 Hz   
**IP20**   
   
**CE**   
**CCT 3000 k**   
**CRI 80+**

### Product technical data


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Screw terminal
Dimming type	DALI
IP rating	20
Protection class	I
Ambient temperature	0 to +25 °C
Light source	LED
Colour temperature	3000k
Color rendering index	80
Rated luminous flux	6,600 lm
Connected load	75.00 W
Luminous efficacy	88.0 lm/W

Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Painted
Height	60.00 cm
Diameter	1,200.00 cm
Weight	12.20 kg
Service lifetime (L80 B10)	50 000 h
Warranty	5 years

### Dimensions

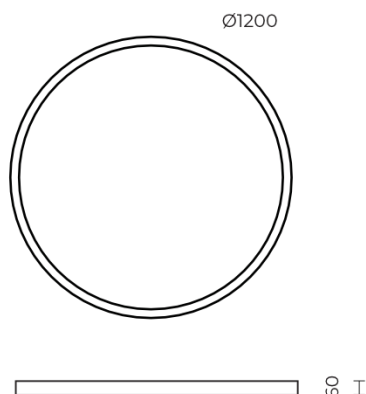

### Light distribution

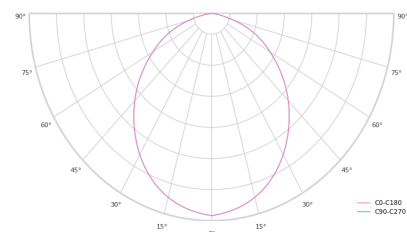

**Available cable colors**

