

Technical datasheet

WORREC-859-S-840-1-80-WH

ARLI

LED 220-240V 50-60Hz IP20    UGR < 19




+421 910 320 796
info@arlistore.com


Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	3 %
Connection method	Screw terminal	Inrush current	8 A
Product description	Premium recessed luminaire with precision optics for dimmable. Ideal for offices, retail spaces and schools where light quality matters. Efficiency up to 141 lm/W, CRI up to 90+, selectable 50° or 80° distribution. Available with DALI control. Lifetime 50,000h, 5-year warranty. Modular sizes 579/859/1139		
Rating	20	Inrush time	48 µs
Protection class	I	Optical system	Lenses
Ambient temperature	0 to +25 °C	Optical part material	PMMA
Light source	LED	Housing material	Aluminium
Rated luminous flux	3,585 lm	Surface finish	Powder coated
Connected load	26.43 W	Width	59.00 cm
Luminous efficacy	135.6 lm/W	Height	53.00 cm
		Length	859.00 cm
		Weight	1.00 kg
		Service lifetime (L80 B10)	50 000 h
		Warranty	5 years

Dimensions

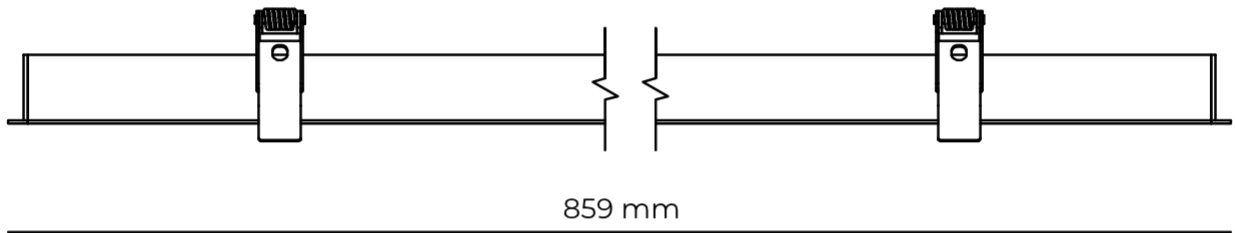

53 mm



59 mm