


Technical datasheet

LINBASSUR-BL-L-840-1

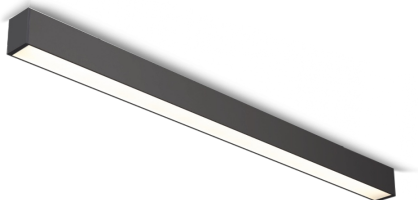

Product description

Linear surface luminaire for offices, classrooms and corridors. Aluminium profile 45 × 75 mm, PC diffuser, white or black finish (RAL 9003 / RAL 9005).

LED

220-240 V
50-60 Hz

IP20


CCT
4000 k

CRI
80+

Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	Plug-in terminal	Optical part material	PC
IP rating	20	Housing material	Aluminium
Protection class	I	Surface finish	Powder coated
Ambient temperature	0 to +25 °C	Width	45.00 cm
Light source	LED	Height	75.00 cm
Colour temperature	4000k	Length	1,208.00 cm
Color rendering index	80	Weight	1.60 kg
Connected load	39.60 W	Service lifetime (L70 B10)	100 000 h
Luminous efficacy	117.4 lm/W	Warranty	5 years

Dimensions

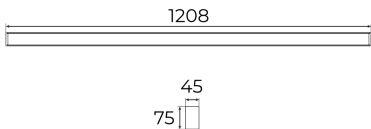

Light distribution

