

Technical datasheet

INDSUSP3-L-850-1-HR



Product description

High-bay led light created with an emphasis on efficiency and easy installation. Suitable for installation in warehouses and production halls.



LED 220-240V 50-60Hz IP65  CE CCT 5000 k CRI 80+ CLO 

Product technical data

Mains voltage 220 - 240V AC, 50/60Hz
 Connection method Connection cable
 Dimming type Non-dimmable

IP rating 65
 Protection class I
 Impact rating IK 08
 Ambient temperature -25 to +30 °C

Light source LED
 Colour temperature 5000k
 Color rendering index 80
 Rated luminous flux 21,483 lm
 Connected load 129.61 W
 Luminous efficacy 165.8 lm/W

Ripple 3 %
 Inrush current 108 A
 Inrush time 322 μs
 Optical system Lenses
 Optical part material PC
 Housing material Aluminium
 Surface finish Powder coated


Width 192.00 cm
 Height 100.00 cm
 Length 320.00 cm
 Weight 4.50 kg
 Service lifetime (L80 B10) >100 000 h
 Warranty 7 years

Dimensions



l 320 mm
 w 192 mm
 h 100 mm

Light distribution

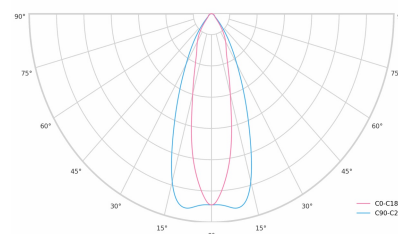


Optional products

Retazový záves
 Industry

Constant Light Output (CLO)

This system compensates for the depreciation of luminous flux to avoid excess lighting at the beginning of the installation's service life. Luminous depreciation over time must be taken into account to ensure a predefined lighting level during the luminaire's useful life.

Without a CLO feature, this simply means increasing the initial power upon installation in order to make up for luminous depreciation. By precisely controlling the luminous flux, the energy needed to reach the required level can be maintained throughout the luminaire's life.

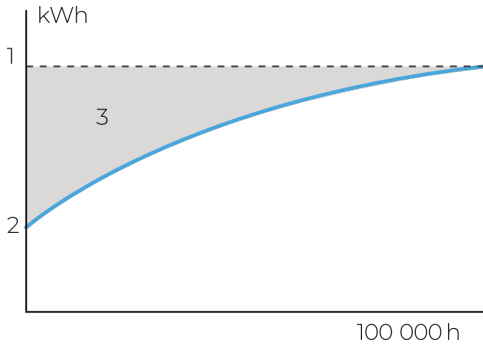

A. Dimming level
B. Time

MidNight function

The MidNight function feature allows an autonomous dimming without the need for an additional control line. The output levels can be set to 0% (OFF) or between 10% and 100% in steps of 1%

Time-based: The dimming profile defined in the reference schedule is referenced to the switch on time of the LED driver.

Astro-based: The dimming profile defined in the reference schedule is referenced to the annual average middle of the night, which is calculated based on the theoretical sunrise and sunset times.



1. Standard lighting level
2. LED lighting consumption with CLO
3. Energy savings