

Family datasheet

Recon



Product description

Recon is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.




LED 220-240 V 50-60 Hz **IP66**  

Technical description


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Connection cable
IP rating	66
Protection class	I
Light source	LED
CRI	70
CCT	4000K, 5000K
Lumen output	4138-7170 lm
Efficiency	Up to 146 lm/W
Power consumption	28-48 W

Optical system	Lenses
Optical part material	Hardened glass
Housing material	Die-cast aluminium
Surface finish	Powder coated
Ambient temperature	-30 to +35°C
Service lifetime (L80 B10)	35 000h
Warranty	3 years

Dimensions

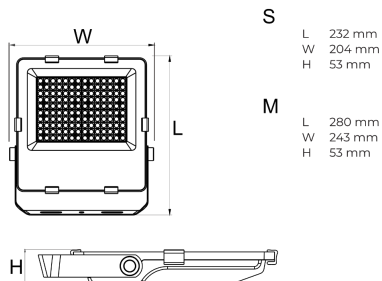

Light distribution curves



Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **Recon-M-740**

Attribute	Value	Code
Model	Recon	Recon-
Version	S	S
	M	M
CCT	4000k (CRI 70+)	740
	5000k (CRI 70+)	750

Optional products

Recon sensor
