Family datasheet

DL easy

Product description

Indoor LED recessed mounted downlight with aluminum reflector. With separate LED driver for direct connection to mains voltage

LED 220-240V 50-60Hz IP20

Technical description

Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Screw terminal
IP rating	20
Protection class	II
Light source	LED
Switching type	Non-dimmable
CRI	80
CCT	3000K, 4000K
Lumen output	1950-2530 lm
Efficiency	Up to 115 lm/W
Power consumption	17-22 W

Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Powder coated
Ambient temperature	0 to +25°C
Service lifetime (L70 B50)	30 000h
Warranty	2 years

Dimensions

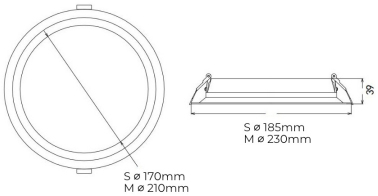

Light distribution curves



Default

Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **DL-M-830-1**

Attribute	Value	Code
Model	DL easy	DL-
Version	S	S
	M	M
CCT	3000k (CRI 80+)	830
	4000k (CRI 80+)	840
Dimming	Non-dimmable	1