

# Technical datasheet

## HEA3-L-850-1-WHR




### Product description

Heavy LED light is perfect for heavy industry, with high temperature resistance up to +60°C. Its casing prevents dust from reaching the coolers and a thin film on the lens protects against particles. With an efficiency of up to 164 lm/W, it provides bright and efficient lighting for your production hall. Say goodbye to issues with graphite fracture particles - Heavy LED light is the solution.

**LED**    220-240V 50-60Hz    **IP65**        **CCT 5000 k**    **CRI 80+**    **CLO**    

### Product technical data

**Mains voltage** 220 - 240V AC, 50/60Hz  
**Connection method** Connection cable  
**Dimming type** Non-dimmable

**IP rating** 65  
**Protection class** I  
**Impact rating** IK 08  
**Ambient temperature** -25 to +60 °C

**Light source** LED  
**Colour temperature** 5000k  
**Color rendering index** 80  
**Rated luminous flux** 32,225 lm  
**Connected load** 196.22 W  
**Luminous efficacy** 164.2 lm/W


**Ripple** 3 %  
**Inrush current** 89 A  
**Inrush time** 584 μs

**Optical system** Lenses  
**Optical part material** PC  
**Housing material** Aluminium  
**Surface finish** Powder coated

**Width** 296.00 cm  
**Height** 135.00 cm  
**Length** 320.00 cm  
**Weight** 7.50 kg


**Service lifetime (L80 B10)** 75 000 h  
**Warranty** 5 years

### Dimensions



**L** 320 mm  
**W** 292 mm  
**H** 135 mm

### Light distribution

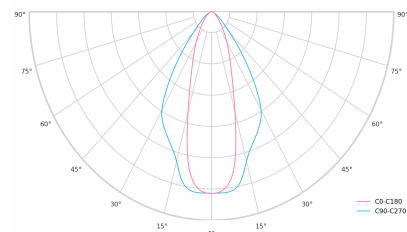

## Constant Light Output (CLO)

This system compensates for the depreciation of luminous flux to avoid excess lighting at the beginning of the installation's service life. Luminous depreciation over time must be taken into account to ensure a predefined lighting level during the luminaire's useful life.

Without a CLO feature, this simply means increasing the initial power upon installation in order to make up for luminous depreciation. By precisely controlling the luminous flux, the energy needed to reach the required level can be maintained throughout the luminaire's life.



A. Dimming level  
B. Time

## MidNight function

The MidNight function feature allows an autonomous dimming without the need for an additional control line. The output levels can be set to 0% (OFF) or between 10% and 100% in steps of 1%

**Time-based:** The dimming profile defined in the reference schedule is referenced to the switch on time of the LED driver.

**Astro-based:** The dimming profile defined in the reference schedule is referenced to the annual average middle of the night, which is calculated based on the theoretical sunrise and sunset times.



1. Standard lighting level  
2. LED lighting consumption with CLO  
3. Energy savings