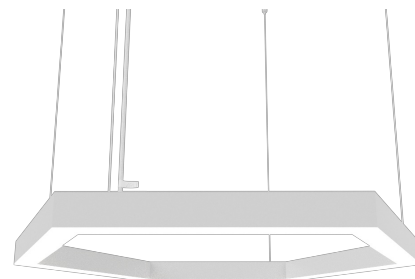


Technical datasheet

HEXSUS-1800-S-830-1-WH-

Product description

The design of the luminaire returns to the power of the basic geometric shapes of the hexagon. By combining several diameters, it is possible to achieve different configurations and lighting scenarios with a great visual impact on the interior.

LED 220-240 V 50-60 Hz **IP20**  **CE** **CCT 3000 k** **CRI 80+**

Product technical data

Mains voltage 220 - 240V AC, 50/60Hz
Connection method Plug-in terminal
Dimming type Non-dimmable

IP rating 20
Protection class I
Ambient temperature 0 to +25 °C


Light source LED
Colour temperature 3000k
Color rendering index 80
Rated luminous flux 4,863 lm
Connected load 46.82 W
Luminous efficacy 103.9 lm/W

Ripple 1 %
Inrush current 37 A
Inrush time 188 μs
Optical system Diffuser
Optical part material PMMA
Housing material Aluminium
Surface finish Powder coated


Width 1,800.00 cm
Height 70.00 cm
Length 1,800.00 cm
Weight 10.00 kg

Service lifetime (L80 B10) 50 000 h
Warranty 5 years

Dimensions



Light distribution

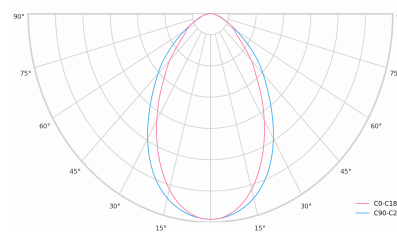

Available cable colors

