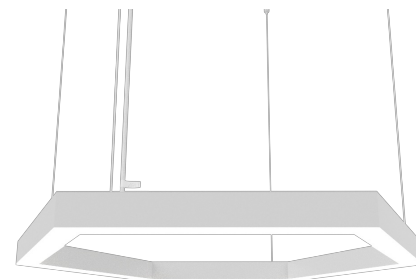


Technical datasheet

HEXSUS-1800-M-940-2-WH-

Product description

The design of the luminaire returns to the power of the basic geometric shapes of the hexagon. By combining several diameters, it is possible to achieve different configurations and lighting scenarios with a great visual impact on the interior.


LED 220-240 V IP20   CCT CRI
 50-60 Hz 4000 k 90+

Product technical data


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
Dimming type	DALI
IP rating	20
Protection class	I
Ambient temperature	0 to +25 °C
Light source	LED
Colour temperature	4000k
Color rendering index	90
Rated luminous flux	5,384 lm
Connected load	57.95 W
Luminous efficacy	92.9 lm/W

Ripple	1 %
DALI address	1
Standby power	0.50 W
Inrush current	53 A
Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Powder coated
Width	1,800.00 cm
Height	70.00 cm
Length	1,800.00 cm
Weight	10.00 kg
Service lifetime (L80 B10)	50 000 h
Warranty	5 years

Dimensions



Light distribution

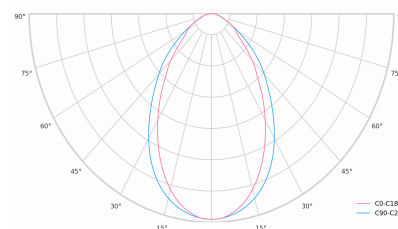

Available cable colors

